



ZONE



HEIGHT (mm)

## STILMAT BARON

Rubber - open

Code: BOR



The BARON is the highest aludoormat in range. For picking up significant amounts of coarse. Imagine your impressive entrance with BARON STILMAT doormat. Suitable for outdoor use and for extreme frequency of passengers. This model is with profiled rubber inserts, ideal for picking up coarse dirt. Anodized aluminum doormat model with 28mm height. The weather-proof solution among the robust solution. Flexible roll-up, extremely hard-wearing entrance mats produced to fit width and walking depth specifications perfectly. Suitable for wheeled traffic. Any geometric shape is available.



Ideal for: Coarse dirt



The weather-proof solution




Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving

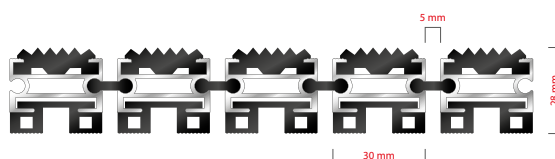

# STILMAT BARON

Rubber - open

**Code: BOR**

<b>Model</b>	<b>BARON (Rubber)</b>
Tread surface (inlay):	Profiled rubber inserts. Weather-proof
Ideal for:	Coarse dirt
Colors:	Black, Grey, Brown...
Version	Open system
Code	BOR
Approx. height (mm)	28
Entrance position	Outdoors
Zones: I – II - III	Zone: I
Load	Extreme
Footfall	Daily footfall of 5000 and up
Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and Light shopping trolleys
Support chassis	Made from rigid anodized aluminum with rubber sound insulation underlay
Aluminum coating:	Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.
Aluminum material thickness (mm)	1.2
Connection	Strong and flexible PVC connection strip, the entire width
Standard profile clearance approx. (mm)	5 mm (optional 3mm for automatic/revolving doors)
Slip resistance	R12 wet, R13 dry
Max width/profile length for each individual section (mm):	6000
Max depth/walking depth for individual units (mm):	Any
Mat divisions as per factory standards or customer specifications	Recommended maximum mat weight of 45 kg
Depth for individual units (mm):	Cca 28
Stationary load kg/100cm <sup>2</sup>	2200
Weight (kg/m <sup>2</sup> )	Cca 25
Logo options	Logo engraving, rubber logo, LED logo
Contact	STILMAT

Guarantee: 5 years on aluminum parts and construction