



ZONE




HEIGHT (mm)



STILMAT DICTATOR

Lux Brush/Ribbed carpet - open

Code: DOBL

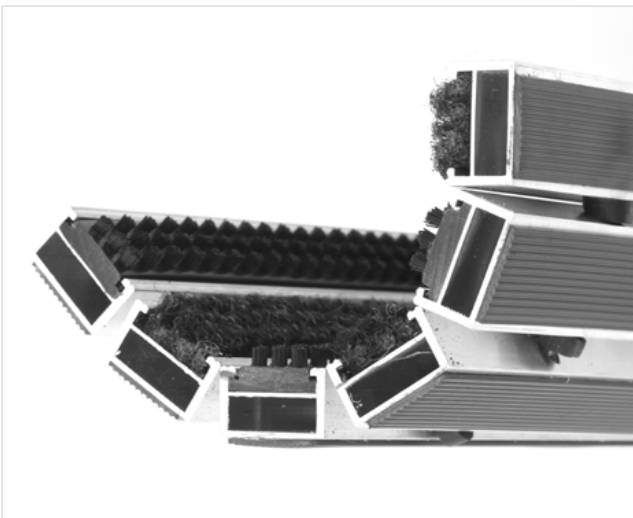

The DICTATOR is the “strongest” model among all STILMAT aluminum doormats. Specially reinforced aluminum construction (2 to 2.5 times comparing to the standard models), where profiles are connected with thick galvanized steel cable and rubber spacers. This model fulfill the needs of facilities with extreme visitors frequency and heavy duty roll-over and drive over capability of any kind of trolley and even forklifts. Profile standard clearance of 5 mm, or 3 mm available as an option for revolving door drives, in accordance with EN 16005.



Ideal for: Coarse dirt, fine dirt and moisture



The weather-proof solution




Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving

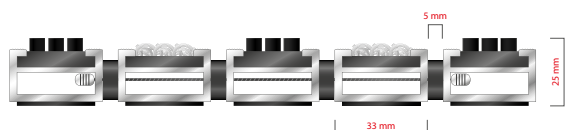

STILMAT DICTATOR

Lux Brush/Ribbed carpet - open

Code: DOBL

| Model | DICTATOR (Lux Brush & Ribbed carpet) |
|---|---|
| Tread surface (inlay): | Lux brushes recessed, robust and High quality ribbed carpet for Public buildings (A+EFL), durable and luxurious character. Made from 100% Polyamide with gel backing. Weather-proof |
| Ideal for: | Coarse dirt, fine dirt and moisture |
| Colors: | Black, Grey, Brown... |
| Version | Open system |
| Code | DOBL |
| Approx. height (mm) | 25 |
| Entrance position | Covered outdoor areas, gateways, passages |
| Zones: I – II - III | Zone: II |
| Load | Extreme |
| Automatic door systems | Profile clearance of 3 mm available as an option for revolving door drives, in accordance with EN 16005 |
| Footfall | Daily footfall of 2000 and up |
| Roll-over and drive-over capability: | Wheelchairs, Prams, Hand and Light shopping trolleys...Forklifts |
| Support chassis | Made from rigid aluminum with rubber sound insulation underlay |
| Aluminum material thickness (mm) | 2.5 |
| Connection | Galvanized steel cable and rubber spacers |
| Standard profile clearance approx. (mm) | 5 mm (or 3mm for automatic/revolving doors) |
| Slip resistance | Brush R13 - Ribbed carpet DS |
| Max width/profile length for each individual section (mm): | 6000 |
| Max depth/walking depth for individual units (mm): | Any |
| Mat divisions as per factory standards or customer specifications | Recommended maximum mat weight of 45 kg |
| Depth for individual units (mm): | Cca 25 |
| Stationary load kg/100cm ² | 4000 |
| Weight (kg/m ²) | Cca 30 |
| Logo options | Logo engraving |
| Contact | STILMAT |

Guarantee: 5 years on aluminum parts and construction