


STILMAT PRESIDENT

Lux Brush - closed

Code: SCB

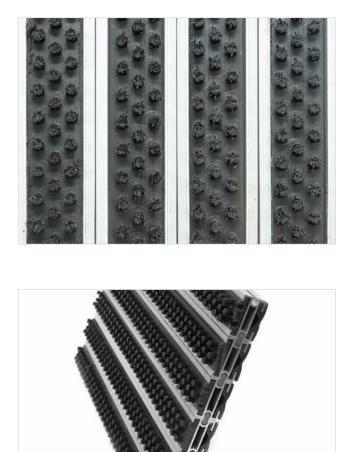

The PRESIDENT of all aluminum doormats. Base model from which everything starts. Proven design, rigid profiles. The alternative system with closed design. Imagine your impressive entrance with PRES-IDENT STILMAT doormat. Suitable for outdoor use and for heavy to extreme frequency of passengers. This model is ideal for picking up coarse dirt. Anodized aluminum doormat model with 24mm height. This model is with thorough brushes for an extra cleaning effect. The weather-proof solution among the robust solution.




Ideal for: Coarse dirt

The weather-proof solution

Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys

Aluminum coating: Fully anodized

Logo options: Logo engraving





STILMAT PRESIDENT

Lux Brush - closed

Code: SCB

| Model | PRESIDENT (Lux Brush) |
|---|---|
| Tread surface (inlay): | Lux brushes recessed, robust. Weather-proof |
| Ideal for | Coarse dirt |
| Colors: | Black, Grey |
| Version | Closed system |
| Code | SCB |
| Approx. height (mm) | 24 |
| Entrance position | Outdoors |
| Zones: – – | Zone: I |
| Load | Extreme |
| Footfall | Daily footfall of 2000 and up |
| Roll-over and drive-over capability: | Wheelchairs, Prams, Hand and Light shopping trolleys |
| Support chassis | Made from rigid anodized aluminum with rubber sound insulation underlay |
| Aluminum coating: | Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum. |
| Aluminum material thickness (mm) | 1.2 |
| Connection | Strong PVC connection strip, the entire width |
| Standard profile clearance approx. (mm) | 0 mm closed system |
| Slip resistance | R13 |
| Max width/profile length for each individual section (mm): | 6000 |
| Max depth/walking depth for individual units (mm): | Any |
| Mat divisions as per factory standards or customer specifications | Recommended maximum mat weight of 45 kg |
| Depth for individual units (mm): | Cca 24 |
| Stationary load kg/100cm² | 2200 |
| Weight (kg/m²) | Cca 25 |
| Logo options | Logo engraving |
| Contact | STILMAT |

Garancija: 5 godina na aluminijumske delove i konstrukciju

