




ZONE




HEIGHT (mm)

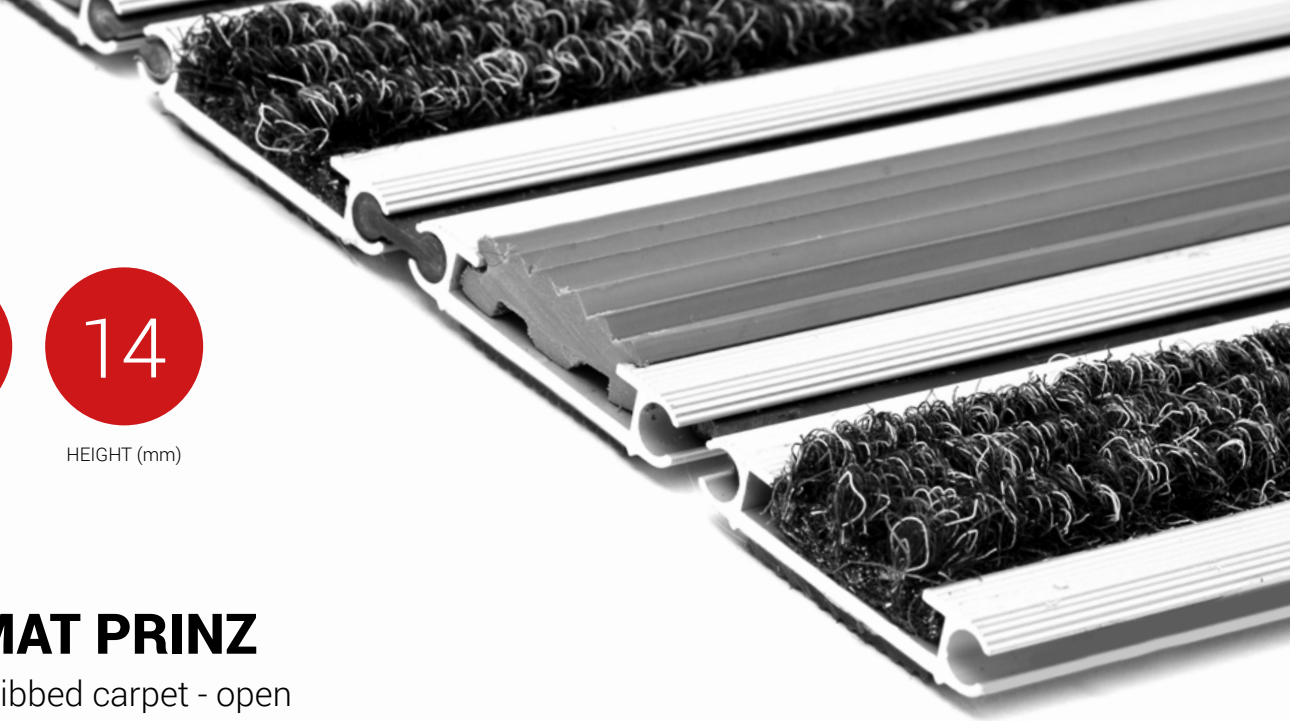

STILMAT PRINZ

Rubber/Ribbed carpet - open

Code: JORL

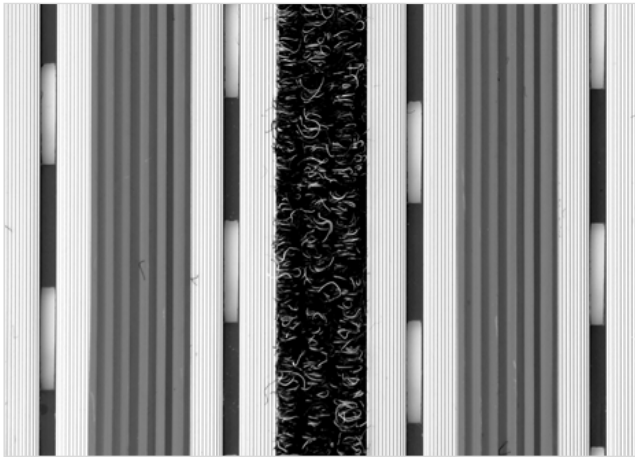

PRINZ is famous and the lowest model of STILMAT alu doormats. Ideal for small pit depth for picking up coarse dirt, fine dirt and moisture. Anodized aluminum doormat model which is only 14mm high, with profiled rubber inserts and high quality ribbed carpet. The weather-proof solution for entrances with normal to heavy visitor frequency. Imagine your impressive entrance with PRINZ STILMAT doormat. Suitable for internal use. Flexible and roll-up, entrance mats produced to fit width and walking depth specifications perfectly. Suitable for wheeled traffic. Any geometric shape is available on demand.



Ideal for: Coarse dirt, fine dirt and moisture



The weather-proof solution



Roll-over and drive-over capability: Wheelchairs, Prams, Hand and Light shopping trolleys



Aluminum coating: Fully anodized



Logo options: Logo engraving



STILMAT PRINZ

Rubber/Ribbed carpet - open

Code: JORL

| Model | PRINZ (Rubber & Ribbed carpet) |
|---|---|
| Tread surface (inlay): | Profiled rubber inserts and High quality ribbed carpet for Public buildings (A+EFL) , durable and luxurious character. Made from 100% Polyamide with gel backing. Weather-proof |
| Ideal for | Coarse dirt, fine dirt and moisture |
| Colors: | Black, Grey, Brown... |
| Version | Open system |
| Code | JORL |
| Approx. height (mm) | 14 |
| Entrance position | Covered outdoor areas, gateways, passages |
| Zones: I – II - III | Zone: II |
| Load | Heavy |
| Footfall | Daily footfall up to 1000 |
| Roll-over and drive-over capability: | Wheelchairs, Prams, Hand and Light shopping trolleys |
| Support chassis | Made from rigid anodized aluminum with rubber sound insulation underlay |
| Aluminum coating | Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum |
| Aluminum material thickness (mm) | 1.2 |
| Connection | Strong and flexible PVC connection strip, the entire width |
| Standard profile clearance approx. (mm) | 5 mm (or 3mm for automatic/revolving doors) |
| Slip resistance | Rubber R12 wet, R13 dry - Ribbed carpet DS |
| Max width/profile length for each individual section (mm): | 6000 |
| Max depth/walking depth for individual units (mm): | Any |
| Mat divisions as per factory standards or customer specifications | Recommended maximum mat weight of 45 kg |
| Depth for individual units (mm): | Cca 14 |
| Stationary load kg/100cm ² | 1650 |
| Weight (kg/m ²) | Cca 14 |
| Logo options | Logo engraving |
| Contact | STILMAT |

Guarantee: 5 years on aluminum parts and construction