

20

20x30


THICKNESS (mm)

DIMENSIONS (mm)

## STILMAT INSTALLATION FRAME

Model i20


Code: IF i20

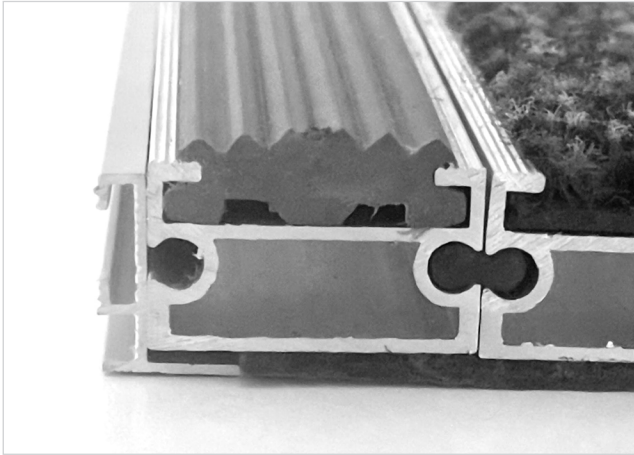

The STILMAT installation frame i20 for mat well base high 20mm gives elegant final touch to any inbuilt STILMAT doormat. It consists of 4 angled profiles with aluminum corners. This frame is unique because it has a flat down side, which provides easy installation without additional leveling. This frame can be fixed with silicone adhesive or screws. The frame is supplied either ready for assembly or pre-assembled (e.g. in the case of frames with curved sections or several sections, etc.). It is compatible with STILMAT models: Prinz, Royal, Mogul, Magnat, Empire, Vice president, President, King and Imperator.

### Features::

- Modern design
- Easy installation
- Matching the height of the doormats
- Hard anodized.
- Reinforced with thicker supporting walls
- Assembled with aluminum corners for perfect joining and fitting the sides
- The perfect finishing touch for STILMAT mat.

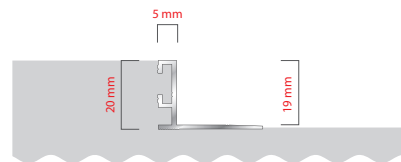

# STILMAT INSTALLATION FRAME

Model i20

**Code: IF i20**

<b>Model</b>	<b>STILMAT Installation frame model i20 – for 20 mm mat base depths</b>
Code	IF i20
Height (mm)	20
Frame dimensions	20 X 30
Entrance position	Indoors/Outdoors
Load	Extreme
Roll-over and drive-over capability:	Wheelchairs, Prams, Hand and ,Light shopping trolleys
Support chassis	Made from rigid anodized aluminum and aluminum corners
Aluminum coating:	Fully anodized, to increase resistance to corrosion and wear. More aesthetically pleasing finish and harder surface than pure aluminum.
Aluminum material thickness (mm)	1.0
Connection	Aluminum corners
Max width/profile length for each individual section (mm):	6000
Max depth/walking depth for individual units (mm):	6000
Depth for individual units (mm):	20 mm.
Please, read installation guide below	
Compatible with STILMAT models:	Prinz, Royal, Mogul, Magnat, Empire, Vice president, President, King and Imperator.
Installation guide:	The frame must be flush with both the screed in the mat well and the floor covering . Mat and mat well: The mat well base , which is usually screed, must be completely leveled. Any unevenness in the mat well must be smoothed out before the mat is laid. This frame can be fixed with silicone adhesive or screws.
Contact	STILMAT

Garancija: 5 godina na aluminijumske delove i konstrukciju